Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

Content-Based Image Search While Maintaining Privacy with Cloud Image Repository

Mr. Atish Gopichand Jadhav[1], Mr. Namdev Sawant[2*], Mr. Subhash Pingale[3]

[1,2,3]Department of Computer Science and Engineering, SKN Sinhgad College of Engineering Pandharpur, Punyashlok Ahilyadevi Holkar Solapur University, Solapur, India.*

Corresponding Email: [2]namdev.sawant@sknscoe.ac.in*

Received: 07 October 2022 **Accepted:** 26 December 2022 **Published:** 28 January 2023

Abstract: ***If you don't know the names of the images, it is important to pick a set of photos that look like informational images and use a search structure that uses the CBIR rule. In general, the CBIR framework breaks down the visual aspects. B. Diversity, image boundaries, surfaces, and nomenclature consistency between input photos and dataset images. The rendering strategy is CNN and the restoration method is cosine similarity. This white paper addresses the problem of large-scale image recovery with a focus on improving accuracy and flexibility. We focus on factors that can affect search performance, such as: B. Varying lighting conditions, object size and structure, and possibly obstacles and crowded facilities.***
These factors are particularly large and track very large data sets with great variability. Suggest REMAP. REMAP is the original CNN-based global descriptor that started and learned on Trio Bungle and is added to an ever-evolving deep set of features from several CNN layers. REMAP is broadly stable across different semantic levels of visual reflection and retains the associated absolute identifiers.

Keywords: CNN, REMAP, CBIR, Cloud Dataset.

1. INTRODUCTION

CBIR is a strategy that uses visual data to separate images from photographic datasets. This system is rudimentary at the moment, as it can effectively address the challenges facing us these days. CBIR uses different methods to handle hidden images, such as histograms and segmentation. In addition, multilayer component vectors are displayed. Component vectors and comparability measures influence how images are reconstructed using material-based image reconstruction techniques.
There is a permanent semantic gap between the general semantics that humans see and the low-level semantics captured in image pixels by PCs. Due to the deep learning method,

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

especially his CNN continuous work, it is a challenge to solve this problem and work on his CBIR implementation.
CBIR is a technique for removing images from a photographic dataset using visual data. This structure is now promising as it can effectively address recently recognized difficulties. CBIR uses two methods to reduce visual material: histogram and division.
To deal with this, an additional complex component vector is used. Partial vectors and comparability measures have the greatest impact on how material-based image restoration techniques restore images. In general, there is a semantic gap between the significant level of semantics that individuals experience and the low level image pixels that PCs collect. Given the continued success of deep learning approaches, especially CNNs, to address the problem of PC vision applications, we decided to solve this problem and tackle the adoption of CBIR. CBIR is a system that uses visual information to extract images from a photo database. This framework is needed now because it can successfully handle previously identified problems. CBIR uses two of his strategies, histogram and division, to reduce visual material. Similarly, the representation uses a multidimensional element vector. Component vectors and similarities greatly influence how a material-based image reconstruction architecture (CBIR) reconstructs an image. There is always a semantic mismatch between the high-level semantics that humans experience and the low-level image pixels that computers collect. Due to the continued success of deep learning approaches, especially convolutional neural networks (CNN), in addressing the problem of PC vision applications, we decided to address this issue to improve the display of CBIR.

Due to the vast amount of media content available, the secondary structure must also be able to accommodate billions of images. These challenges must be overcome with active and delimited visual representations. CNN has provided successful answers for several PC vision tasks. B. As a collection of images. However, it doesn't seem to handle the image recovery problem with the expected performance benefits, especially at very high levels. The main reason for this is that despite all this, two major issues remain unresolved. (1) how to combine relevant features separated by the CNN strategy into moderate and discriminative image-level depictions and (2) how to construct a subsequent CNN aggregator designed for the image recovery task. This research addresses the very large scale image recovery problem and focuses on improving its robustness and accuracy.

Literature Review
Husay et al. [1] addresses the aforementioned problems by proposing a new holistic location-based method that uses multi-layered deep properties and establishes a relevant design that is trainable from start to finish. The name of the descriptor, Region-Entropy1-based multi-layer abstraction pooling, reflects the most important advancement.

Content-Aware Image Recovery is a popular way to recover images from large unlabeled photo archives. On the other hand, customers are dissatisfied with traditional data recovery methods.
We also continue to expand the number of photos available to our customers and the expansion of our online production and submission system. The result is a continuous and

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

widespread production of better images in many countries. Quickly accessing these huge photo databases and reconstructing (querying) comparable images for a given image from them is a major obstacle and requires an efficient method. The representations of material-based image reconstruction approaches rely heavily on similarity estimation and component representation.

Uhuda Mohammed et al. [2] introduced a simple but effective deep learning structure based on Convolutional Neural Networks (CNN) and Support Vector Machines for fast image restoration based on Highlight Extraction and Grouping (SVM).

To search a collection of photos similar to an input image without knowing the name of the image, a search framework that implements the concept of CBIR should be used. Finally, the CBIR framework matches the input photo to the images in the database using visual aspects such as color, image edges, surface finish, and name aptitude. CNN is used for grouping and cosine similarity is used for reconstruction. The five categories in the dataset each contain five subclasses.

Recreational classes are master classes, and each giant class picture is a composition image of the giant class's subclasses.
Rian, Z., From the study CNN approach by others. [3] helped aid the recovery effort by sorting the image classes. A study of interactive media content has been used in several real-world PC vision applications, and sophisticated photographs provide a significant portion of the visual and auditory information. In recent years, the multidimensionality of mixed media materials, especially photography, has increased dramatically, with vast numbers of photographs being continuously transferred into multiple chronicles. B. Twitter, Facebook and other his Instagram. Scanning relevant images from the Chronicles is a challenging research challenge for PC vision networks. The majority of online indexes restore images based on standard content assembly approaches that rely on captions and metadata. Recently, CNN-based image representations were shown to provide powerful descriptors for image retrieval, outperforming previous inclusions of CNN as short vector representations. However, such models are not ideal for geometry-aware repositioning strategies, and traditional approaches based on precise descriptor tuning, geometric repositioning, or query construction on specific item recovery benchmarks Better than image search framework. In the paper [5], we use the same basic data obtained from the CNN to return to both phases of recovery, specifically search and rearrangement initiation.

R. Arandjelovi'c et al. [6] addressed the problem of large-scale viewpoint detection, the task of quickly and accurately detecting regions of a given query image. His three accompanying head engagements are presented by the creators. First and foremost, we build a convolutional neural system (CNN) architecture that can be trained from start to finish for point detection problems.

The main section of this design, NetVLAD, is another aggregated VLAD layer animated by an image representation of a vector of locally aggregated descriptors, commonly used in

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

image recovery. This layer can be quickly plugged into any CNN engineering and adaptable for back engineering.
A. Gordo et al. In [7], he argues that there are three reasons for the poor results of deep image restoration techniques. We will carefully care for each of the three concerns. First, we construct a programmed cleansing process that biases a large but noisy milestone data set and produces a good preparatory set for deep recovery. Next, we will discuss the RMAC rolling description. Show that it can be deciphered as a profound and identifiable design. Provide extensions to improve it.

More complex nervous systems are becoming increasingly difficult to dissect. K. They. [8] We provide the rest of the learning system to support the development of much more detailed systems than those already in use.

They explicitly restructure the layers so that they learn lasting competencies through layer contributions rather than learning unreferenced skills. This work provides extensive and precise evidence suggesting that these surviving systems are not too difficult to upgrade and can gain accuracy from much greater depth.

S. Xie et al. [9] provides a simple and highly modular image grouping method. Our system is constructed by reprocessing structural barriers with multiple altered topologies. Our main technique results in a homogenous multibranch architecture that sets minimal hyperparameters. In addition to measuring depth and width, this approach revealed an important factor known as 'cardinality' (the magnitude of the array of changes). Using the ImageNet 1K dataset, we show how increasing the cardinality improves placement accuracy under the constraint of managing unpredictability.

[10], K. Simonyan and A, Zisserman investigates the effect of convolutional network depth on the accuracy of large-scale image recognition. Their main contribution is a rigorous study of networks with increasing depth using architectures with incredibly small (3 3) convolutional filters, and when increasing the depth to 16–19 weight layers, showing that it can significantly outperform the previous setup. These results laid the groundwork for entry into the 2014 ImageNet Challenge, where the team placed 1st and his 2nd in the localization and classification tracks respectively.


Proposed Work
The structure of the REMAP descriptor reveals two major problems when dealing with content-based image recovery: fast collection of multifaceted and multi-layered representations using end-to-end preparation, and (I) characterization separated by a new multi-layer deep convolution highlight correction component CNN system. Our method is characterized by combining a set of intrinsic deep highlights from numerous CNN layers. It was specifically created to address the different levels of visibility of visual components and to radically improve detection. Importantly, our multi-tiered architecture is explicit and ready to be fully identified from start to finish. This means that several CNN layers are generated together.

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

These differ from MS-RMAC structures in that instead of fully prepared CNNs, fixed charges of preprocessed CNNs are used as element extractors. Our REMAP solution includes end-to-end multi-layer fine-tuning that simultaneously improves CNN channel load, relative entropy load, and PCA + whitening load via stochastic gradient descent (SGD) and triplet misfortune work. is included. CNNs must be built right from start to finish, as they clearly allow for complementarity within the layers, greatly improving performance. Without coupling layered learning in this way, the highlights from additional layers, while sometimes valuable, are not discriminatory or reciprocal. Figure 1 shows REMAP multilayer processing. Here, a number of equal preparation threads originate from the convolutional CNN layer, each containing ROI pooling, L2 standardization, relative entropy weighting, sum pooling, and combined into a single descriptor.

Another important advance in the recommended method is district entropy weighting. The goal is to understand how devastating individual specific qualities are in each region and use that knowledge to guide future holistic pool activities. Spatial entropy is the relative entropy between separate cycles of adjusted and unadjusted image descriptor sets derived using the KL dissimilarity approach. Regions with significant differences (high KL dissimilarity) between calibrated and uncoordinated distributions experience greater pressure as intelligence increases. Our entropy-driven pooling allows us to consolidate denser location-based collections without risking overloading the most knowledgeable areas. The KL Dissimilarity Weighting (KLW) block in the REMAP design is primarily implemented using convolutional layers with loads introduced by the KL difference estimation and reinforced on the triplet loss task using Stochastic Gradient Descent (SGD) will be Combining the resulting vectors, PCA whitening and L2 normalization yields a global image description.

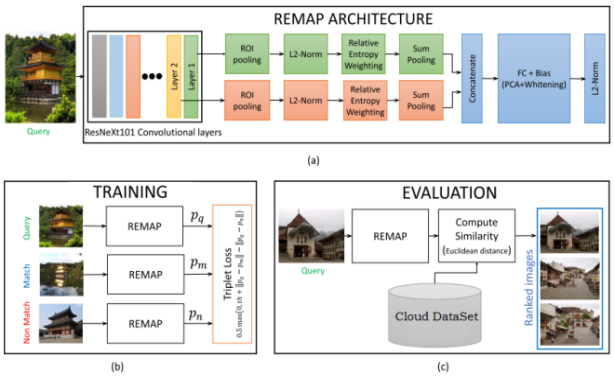

Figures (a) proposed REMAP architecture with KL divergence-based weighting (KLW) and multi-layer aggregation (MLA), (b) training REMAP CNN on landmark dataset with triplet loss, and (c)State -of- art record.

Each square corresponds to a differentiable activity, so REMAP allows you to prepare an entire engineering project from start to finish. We recommend reading the Experiment section to fully understand the cloud dataset and preparation steps. Use triplet misfortune to prepare the landmark recovery cloud dataset. Additionally, we use a product quantization (PQ)

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

approach to encode REMAP markers in the test dataset to reduce storage requirements and predictability of the recovery framework.

2. CONCLUSION

A spectacular CNN-based architecture called REMAP can be used to learn deep highlighting command chains for different levels of relevance visual reflexes. We mix a large number of these scattered CNN highlights from different geographic locations and pack them with weights that reflect their uniqueness. Loads are computed using the KL differential data for each spatial location and optimized end-to-end using SGD and CNN functions. Triplet Misfortune is used throughout the construction preparation and extensive testing has shown that REMAP outperforms state-of-the-art technologies.

3. REFERENCES

1. Husain, S. S., &Bober, M. (2019). REMAP: Multi-layer entropy-guided pooling of dense CNN features for image retrieval. IEEE Transactions on Image Processing, 1–1.
2. Content-Based Image Retrieval Using Convolutional Neural Networks Ouhda Mohamed, El Asnaoui Khalid, Ouanan Mohammed, and AksasseBrahim Springer International Publishing AG, part of Springer Nature 2019 J. Mizera-Pietraszko et al. (Eds.): RTIS 2017, AISC 756, pp. 463–476, 2019.
3. Rian, Z., Christanti, V., &Hendryli, J. (2019). Content-Based Image Retrieval using Convolutional Neural Networks. 2019 IEEE International Conference on Signals and Systems (ICSigSys). doi:10.1109/icsigsys.2019.8811089
4. Latif, A., Rasheed, A., Sajid, U., Ahmed, J., Ali, N., Ratyal, N. I., Khalil, T. (2019). Content-Based Image Retrieval and Feature Extraction: A Comprehensive Review. Mathematical Problems in Engineering, 2019, 1–21. doi:10.1155/2019/9658350
5. G. Tolias, R. Sicre, and H. Jégou, "Particular object retrieval with integral max-pooling of CNN activations," in Proc. Int. Conf. Learn Representations, 2016.
6. R. Arandjelovi´c, P. Gronat, A. Torii, T. Pajdla, and J. Sivic, "NetVLAD: CNN architecture for weakly supervised place recognition," IEEE Trans. Pattern Anal. Mach. Intell., vol. 40, no. 6, pp. 1437–1451, Jun. 2018.
7. A. Gordo, J. Almazán, J. Revaud, and D. Larlus, "End-to-end learning of deep visual representations for image retrieval," Int. J. Comput. Vis., vol. 124, no. 2, pp. 237–254, Sep. 2017.
8. K. He, X. Zhang, S. Ren, and J. Sun, "Deep residual learning for image recognition," in Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR), Jun. 2016, pp. 770–778.
9. S. Xie, R. Girshick, P. Dollár, Z. Tu, and K. He, "Aggregated residual transformations for deep neural networks," in Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR), Jul. 2017, pp. 5987–5995
10. K. Simonyan and A. Zisserman, "Very deep convolutional networks for large-scale image recognition," in Proc. Int. Conf. Learn. Represent. 2015.

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

11. BhanudasGadade and AltafMulani, "Automatic System for Car Health Monitoring, International Journal of Innovations in Engineering Research and Technology, 57–62, 2022
12. PratimaAmolKalyankar, Altaf O. Mulani, Sampada P. Thigale, PranaliGajananChavhan andMakarand M. Jadhav, "Scalable face image retrieval using AESC technique", Journal Of AlgebraicStatistics Volume 13, No. 3, p. 173 – 176, 2022.
13. A. O. Mulani and G. N. Shinde, "An approach for robust digital image watermarking using DWT- PCA", Journal of Science and Technology, Vol.6, Special Issue 1, 2021.
14. DOI: https://doi.org/10.46243/jst.2021.v6.i04.pp59- 62
15. U. P. Nagane and A. O. Mulani, "Moving Object Detection and Tracking Using Matlab", Journal of Science and Technology, Vol.6, Special Issue 1, 2021. DOI: https://doi.org/10.46243/jst.2021.v6.i04.pp63- 66
16. Jadhav M. M., G. H. Chavan and A. O. Mulani, "Machine Learning based Autonomous Fire Combat Turret", Turkish Journal of Computer and Mathematics Education (TURCOMAT), 12(2), 2372- 2381,2021
17. Dr. P. B. Mane and A. O. Mulani, "High throughput and area efficient FPGA implementation of AES algorithm", International Journal of Engineering and Advanced Technology, Vol. 8, Issue 4, April 2019.
18. Ganesh Shinde and AltafMulani, "A Robust Digital Image Watermarking using DWT-PCA", International Journal of Innovations in Engineering Research and Technology (IJIERT), Vol. 6 Issue 4 April 2019.
19. A. O. Mulani and Dr. P. B. Mane, "Secure and area Efficient Implementation of Digital Image Watermarking on Reconfigurable Platform", International Journal of Innovative Technology andExploring Engineering, Vol. 8, Issue 2,Dec. 2018
20. P. B. Mane and A. O. Mulani, "High Speed Area Efficient FPGA Implementation of AES Algorithm",International Journal of Reconfigurable and Embedded Systems, Vol. 7, No. 3, November 2018, pp. 157- 165.
21. RenukaKondekar and A. O. Mulani, "Raspberry pi based voice operated Robot", International Journal of Recent Engineering Research and Development (IJRERD), Vol. 2 Issue 12, Dec. 2017.
22. Kulkarni P.R., Mulani A.O. and Mane P. B., "Robust Invisible Watermarking for Image Authentication", In Emerging Trends in Electrical, Communications and Information Technologies,Lecture Notes in Electrical Engineering, vol. 394,pp. 193- 200, Springer, Singapore, 2017. DOI: 10.1007/978-981-10-1540- 3_20
23. A.O.Mulani and Dr.P.B.Mane, "An Efficient implementation of DWT for image compression onreconfigurable platform", International Journal of Control Theory and Applications, Vol.10 No.15,2017.
24. A.O.Mulani and Dr.P.B.Mane, "Fast and Efficient VLSI Implementation of DWT for Image Compression", International Journal for Research in Applied Science & Engineering Technology, Vol.5 Iss. IX, pp. 1397- 1402, 2017.
25. A.O.Mulani and Dr.P.B.Mane, "Watermarking and Cryptography Based Image Authentication on Reconfigurable Platform", Bulletin of Electrical Engineering and Informatics, Vol.6 No.2, pp 181- 187,2017. DOI: 10.11591/eei.v6i2.651

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

26. RutujaAbhangrao, ShilpaJadhav, PriyankaGhodke and AltaafMulani, "Design And Implementation Of 8- Bit Vedic Multiplier", JournalNX, pp. 24–26, Mar. 2017.
27. A.O.Mulani and Dr.P.B.Mane, "Area Efficient High Speed FPGA Based Invisible Watermarking forImage Authentication", Indian Journal of Science and Technology, Vol.9. No.39, Oct. 2016.ISSN-0974- 5645 DOI: 10.17485/ijst/2016/v9i39/101888
28. AmrutaMandwale and A. O. Mulani, "Implementation of High Speed Viterbi Decoder using FPGA",International Journal of Engineering Research & Technology (IJERT), Feb. 2016.
29. D. M. Korake and A. O. Mulani, "Design of Computer/Laptop Independent Data transfer systemfrom one USB flash drive to another using ARM11 processor", International Journal of Science,Engineering and Technology Research, 2016.
30. Rahul G. Ghodake and A. O. Mulani, "Sensor Based Automatic Drip Irrigation System", Journal forResearch, 53-56, 2016.
31. Rahul Shinde and A. O. Mulani, "Analysis of Biomedical Image", International Journal on Recent&Innovative trend in technology (IJRITT), July 2015.
32. Rahul Shinde and A. O. Mulani, "Analysis of Biomedical Image using Wavelet Transform", International Journal of Innovations in Engineering Research and Technology (IJIERT), July 2015.
33. Priyanka Kulkarni and A. O. Mulani, "Robust Invisible Digital Image Watermarking using DiscreteWavelet Transform", International Journal of Engineering Research & Technology (IJERT), Vol. 4Issue01, pp.139- 141, Jan.2015.
34. Ganesh Shinde and AltafMulani, "A Comparative Approach to a Robust Digital Image Watermarking using DWT- PCA", IEEE International Conference on Electrical, Electronics,Computers, Communication,Mechanical and Computing, Jan. 2018.
35. RenukaKondekar and A. O. Mulani, "Voice operated Robot using Raspberry pi", IEEE InternationalConference on Innovations in Power and Advance Computing Technology (i- PACT – 2017), April2017.
36. S. S. Swami and A. O. Mulani, "An efficient FPGA implementation of Discrete Wavelet Transformfor image compression", International Conference on Energy, Communication, Data AnalyticsandSoft Computing (ICECDS),2017.
37. Rahul G. Ghodake and A. O. Mulani, "Microcontroller Based Drip Irrigation System", Techno-societal 2016, International conference on advanced technologies for societal applications, pp.109–115.
38. Priyanka Kulkarni and A. O. Mulani, "Robust invisible Watermarking for image authentication",IEEE International Conference On Emerging Trends In Electrical, Communication And Information Technologies (ICECIT), Dec. 2015.
39. Rahul Shinde and A. O. Mulani, "Biomedical Image fusion using Wavelet transform", InternationalConference On Current Advances in Electronics, Electrical and Computer science (ICEECS), August2015.
40. Deshpande H. S., Dr. K. J. Karande and A. O. Mulani, "Area optimized implementationof AES algorithm on FPGA", IEEE International Conference on Communication and Signal Processing, April 2015.

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

41. Priyanka Kulkarni and A. O. Mulani, “Application of MATLAB for Second Level Discrete WaveletTransform through Filter Bank”, IEEE International Conference on Engineering and Technology (ICETECH), March 2015.
42. A. O. Mulani and P. B. Mane, "Area optimization of cryptographic algorithm on less densereconfigurable platform", International Conference on Smart Structures and Systems (ICSSS),2014, pp. 86- 89. DOI: 10.1109/ICSSS.2014.7006201
43. AmrutaMandwale and A. O. Mulani, “Different Approaches For Implementation of Viterbi decoder”, IEEE International Conference on Pervasive Computing (ICPC), Jan. 2015.
44. AmrutaMandwale and A. O. Mulani, “Implementation of Convolutional Encoder & DifferentApproaches for Viterbi Decoder”, IEEE International Conference on Communications, SignalProcessing Computing and Information technologies, Dec. 2014.
45. Deshpande H. S., Dr. K. J. Karande and A. O. Mulani, “Efficient Implementation of AES Algorithm onFPGA”, IEEE International Conference on Communication and Signal Processing, April2014.
46. A. O. Mulani and Dr. P. B. Mane, “High throughput area efficient FPGA implementation of AESAlgorithm”, in the Intech Open Access Book entitled Computer and Network Security, Feb. 2019.
47. A.O.Mulani, M. M. Jadhav and Mahesh Seth, “Painless Non- invasive blood glucose concentrationlevel estimation using PCA and machine learning” in the CRC Book entitled Artificial Intelligence,Internet of Things (IoT) and Smart Materials for Energy Applications, 2022.
48. Hemlata M. Jadhav, AltafMulani and Makarand M. Jadhav, “Design and Development of Chatbot based on Reinforcement Learning”, in the Wiley-IEEE book entitled Natural Language Processing using Machine and Deep Learning, 2022
49. Liyakat, K. K. S., Warhade, N. S., Pol, R. S., Jadhav, H. M., &Mulani, A. O. (2022). Yarn Quality detection for Textile Industries using Image Processing. Journal Of Algebraic Statistics, 13(3), 3465-3472.
50. Pol, R. S., Deshmukh, A. B., Jadhav, M. M., Liyakat, K. K. S., &Mulani, A. O. (2022). iButton Based Physical access Authorization and security system. Journal of Algebraic Statistics, 13(3), 3822-3829.
51. Kashid, M. M., K. J. Karande, and A. O. Mulani. "IoT-Based Environmental Parameter Monitoring Using Machine Learning Approach." Proceedings of the International Conference on Cognitive and Intelligent Computing: ICCIC 2021, Volume 1. Singapore: Springer Nature Singapore, 2022.
52. Pathan, A. N., Shejal, S. A., Salgar, S. A., Harale, A. D., &Mulani, A. O. (2022). Hand Gesture Controlled Robotic System. Int. J. of Aquatic Science, 13(1), 487-493.
53. Kolekar, S. D., Walekar, V. B., Patil, P. S., Mulani, A. O., &Harale, A. D. (2022). Password Based Door Lock System. Int. J. of Aquatic Science, 13(1), 494-501.
54. Patale, J. P., Jagadale, A. B., Mulani, A. O., &Pise, A. (2023). A Systematic survey on Estimation of Electrical Vehicle. Journal of Electronics, Computer Networking and Applied Mathematics (JECNAM) ISSN: 2799-1156, 3(01), 1-6.

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)

Journal of Image Processing and Intelligent Remote Sensing
ISSN 2815-0953
Vol: 03, No. 01, Dec 2022-Jan 2023
http://journal.hmjournals.com/index.php/JIPIRS
DOI: https://doi.org/10.55529/jipirs.31.30.39

55. Maske, Y., Jagadale, M. A., Mulani, A. O., &Pise, M. A. Development of BIOBOT System to Assist COVID Patient and Caretakers. European Journal of Molecular & Clinical Medicine, 10(01), 2023.
56. Kamble, Akshata, and A. O. Mulani. "Google Assistant based Device Control." Int. J. of Aquatic Science 13.1 (2022): 550-555.
57. Maske, Yogita, Mr AB Jagadale, Altaf O. Mulani, and Mrs AC Pise. "Development of BIOBOT System to Assist COVID Patient and Caretakers." European Journal of Molecular & Clinical Medicine 10, no. 01: 2023.
58. Takale, Swapnil, and AltaafMulani. "DWT-PCA based Video Watermarking." Journal of Electronics, Computer Networking and Applied Mathematics (JECNAM) ISSN: 2799-1156 2.06 (2022): 1-7.
59. Boxey, A., Jadhav, A., Gade, P., Ghanti, P., &Mulani, A. O. (2022). Face Recognition using Raspberry Pi. Journal of Image Processing and Intelligent Remote Sensing (JIPIRS) ISSN 2815-0953, 2(04), 15-23.

Copyright The Author(s) 2023.This is an Open Access Article distributed under the CC BY license. (http://creativecommons.org/licenses/by/4.0/)